Your Torque Partner
TOHNICHI America

www.tohnichi.com

Home / Products / Torque Wrench / Adjustable Click Type Torque Wrench / MTQL

Torque Wrench

MTQL Adjustable Click Type Torque Wrench for Motorcycle Maintenance

DIRECTION

RoHS ASSEMBLY ADJUSTABLE RATCHET HEAD GRADUATION WITH QUICK COUPLER

Features

- Motor-sports Torque Wrench features wider torque range ideal for motor-sports vehicle maintenance
- Attractive chrome surface finish and knurled grip for better handling in oily environments.
- A clear "click" sound signals tightening completion upon reaching the set torque.
- The ratchet head has 24 teeth with a 15 degree operating range, allowing for use in space-limited working conditions.
- Torque setting is easy to adjust by knob and scale.
- All models come with a carrying case.

MTQL40N [Overall length 250 mm]

MTQL70N [Overall length 285 mm]

MTQL140N [Overall length 400 mm]

Specifications

Accuracy ±5%					
S.I. MODEL			**MTQL40N**	**MTQL70N**	**MTQL140N**
TORQUE RANGE [N • m]	**MIN. ～ MAX.**		5～40	10～70	20～140
	GRAD.		0.5	1	
METRIC MODEL			**400MTQL**	**700MTQL**	**1400MTQL**
TORQUE RANGE [Kgf • m]	**MIN. ～ MAX.**		0.5～4	1～7	2～14
	GRAD.		0.05	0.1	
APPLICABLE BOLT	**COMMON STEEL**		M6, M8, M10	M8, M10, M12, (M14)	M10, M12,(M14), M16
	HIGH TENSION		M5, M6, (M7), M8	M6, (M7), M8, M10	(M7), M8, M10, M12
MAX. HAND FORCE [N]			227	337	438
DIMENSION [mm]	**EFFECTIVE LENGTH**	**L**	176	207.5	320
	OVERALL LENGTH	**L'**	250	285	400
	SQ. DRIVE	**a**	9.53		12.7
		b	11		14
	HEAD	**R**	13	16	18.8
		h	27.5	25.6	33.5
	BODY	**m**	25.5		28
		n	11.2		12.2
		D	20		21.7
		B	36		37
WEIGHT [kg]			0.45	0.47	0.77

Notes

MTQL accuracy: ±5%.

Standard accessories
Carrying case.

Dimensions

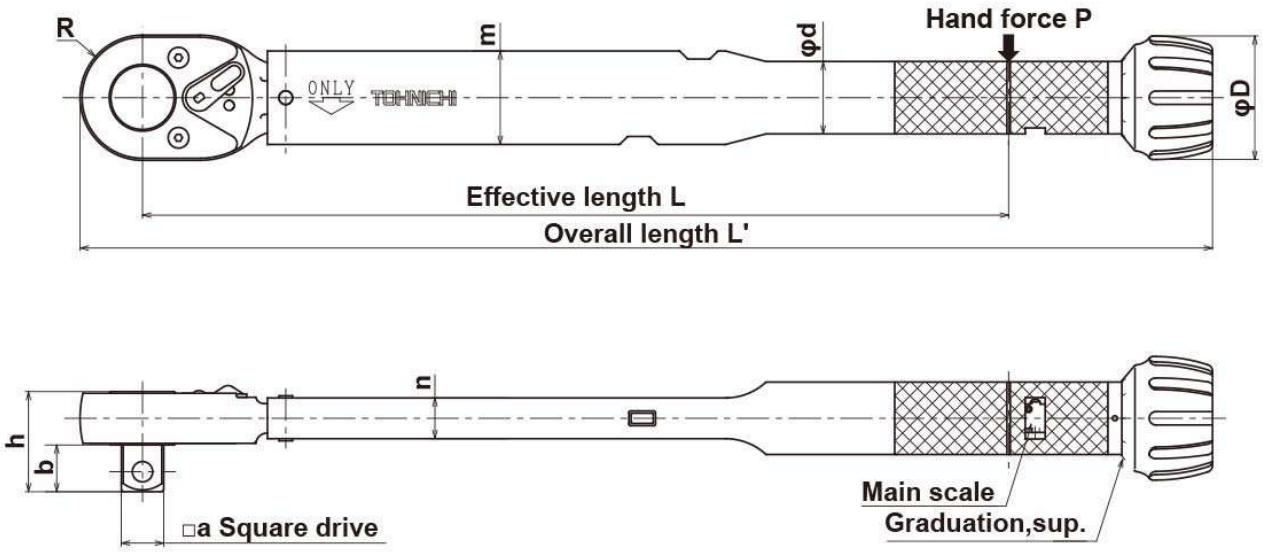

Accessories

Sockets

Carrying Case